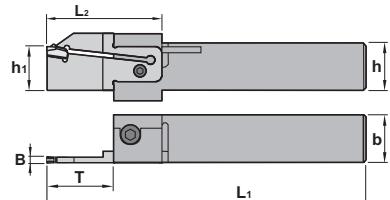
**Characteristics:**

Modular system for inserts with thickness from 3 to 4 mm.

The "V" positioning system of the pocket and the clamp integrated to the tool ensure maximum security and repetitivity on the dimensions when the insert is changed.

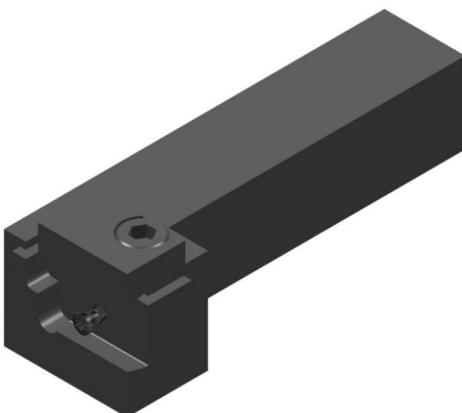
**Applications:**

Parting, grooving and face grooving toolholder that works well on steels, alloyed steels, stainless steels and refractories.

**CZGB**

Ref.		<b>h</b>	<b>b</b>	<b>L<sub>1</sub></b>	<b>L<sub>2</sub></b>	<b>h<sub>1</sub></b>	<b>B</b>	<b>T</b>	<b>Kg</b>
	<b>CZGB R/L 2020 M34</b>	20	20	150	53	20	3-4	25-30	0,600
	<b>CZGB R/L 2525 M34</b>	25	25	150	53	25	3-4	25-30	0,750
	<b>CZGB R/L 3232 P34</b>	32	32	170	53	32	3-4	25-30	1,300

<b>Ref.</b>	<b>CZGB R/L 2020 M34</b>	1396	5005
	<b>CZGB R/L 2525 M34</b>	1396	5005
	<b>CZGB R/L 3232 P34</b>	1396	5005


**Characteristics:**

Modular system for inserts with thickness from 3 to 4 mm.

The "V" positioning system of the pocket and the clamp integrated to the tool ensure maximum security and repetitivity on the dimensions when the insert is changed.


**Applications:**

Parting, grooving and face grooving toolholder that works well on steels, alloyed steels, stainless steels and refractories.


**CZFB**

Ref.		<b>h</b>	<b>b</b>	<b>L<sub>1</sub></b>	<b>L<sub>2</sub></b>	<b>h<sub>1</sub></b>	<b>B</b>	<b>T</b>	<b>Kg</b>
	<b>CZFB R/L 2525 M34</b>	25	25	150	25	25	3-4	25-30	0,750
	<b>CZFB R/L 3232 P34</b>	32	32	170	25	32	3-4	25-30	1,300



<b>Ref.</b>	<b>CZFB R/L 2525 M34</b>	1396	5005
	<b>CZFB R/L 3232 P34</b>	1396	5005

**CZXB 00**


Ref.		L	L <sub>2</sub>	B	Insert size
	CZXB R/L 00X03	53	25	3	MRCN 03
	CZXB R/L 00X04	53	25	4	MRCN 04

**CZXB 40-50**


Ref.		L	L <sub>2</sub>	B	Ø Range	Insert size
	CZXB R/L 4050X03	53	20	3	40 - 50	MTE 03
	CZXB R/L 4050X04	53	20	4	40 - 50	MTE 04

**CZXB 50-65**


Ref.		L	L <sub>2</sub>	B	Ø Range	Insert size
	CZXB R/L 5065X03	53	20	3	50 - 65	MTE 03
	CZXB R/L 5065X04	53	20	4	50 - 65	MTE 04

**CZXB 65-92**


Ref.		L	L <sub>2</sub>	B	Ø Range	Insert size
	CZXB R/L 6592X03	53	20	3	65 - 92	MTE 03
	CZXB R/L 6592X04	53	20	4	65 - 92	MTE 04

**CZXB 90-122**


Ref.		L	L <sub>2</sub>	B	Ø Range	Insert size
	CZXB R/L 90122X03	53	25	3	90 - 122	MTE 03
	CZXB R/L 90122X04	53	25	4	90 - 122	MTE 04

**CZXB 120-160**

Ref.		L	L <sub>2</sub>	B	Ø Range	Insert size
	CZXB R/L 120160X03	53	25	3	120 - 160	MTE 03
	CZXB R/L 120160X04	53	25	4	120 - 160	MTE 04



**CZXB 150-500**

Ref.		L	L <sub>2</sub>	B	Ø Range	Insert size
	CZXB R/L 150500X03	53	25	3	150 - 500	MTE 03
	CZXB R/L 150500X04	53	25	4	150 - 500	MTE 04

**MRCN / MTE**

Ref.		s	r
	MRCN 03 / MTE 03	3,0	0,20
	MRCN 04 / MTE 04	4,0	0,20

Single-ended insert for parting and grooving



MRCN

MTE



For more information see page: G.03